



RECHARGEABLE SEALED LEAD ACID BATTERY

Revision 2.4



WP4.5-6S

Specifications

Nominal Voltage (V) 6V

Nominal Capacity

20hour rate (0.225A to	5.25V)	4.5Ah
10hour rate (0.45A to	5.25V)	4.5Ah
5hour rate (0.765A to	5.25V)	3.825Ah
1C (4.5A to	4.80V)	3.15Ah
3C (13.5A to	4.80V)	2.295Ah

Weight 0.923kg(2.04Lbs.)

Internal Resistance (at 1KHz) 16 mΩ

Maximum Discharge Current for
30 seconds : 90A

Maximum Discharge Current for
5 seconds : 180A

Operating Temperature Range

Charge	0°C (32°F) to	40°C (104°F)
Discharge	-15°C (5°F) to	50°C (122°F)
Storage	-15°C (5°F) to	40°C (104°F)

Charge Retention (shelf life) at 20°C (68°F)

1 month	92%
3 month	90%
6 month	80%

Charging Methods at 25°C(77°F)

Cycle use:

Charging Voltage 7.20 to 7.50V
Maximum Charging Current : 1.35A

Standby use :

Float Charging Voltage 6.75 to 6.90V

Life expectancy :

Cycle Use :

100% depth of discharge 200 cycles
80% depth of discharge 225 cycles
50% depth of discharge 500 cycles

Standby Use : 3~5years



Case Material ABS

(Option : 94-HB & 94V-0 flame retardant case)

Terminal

F1 or F2

Dimensions

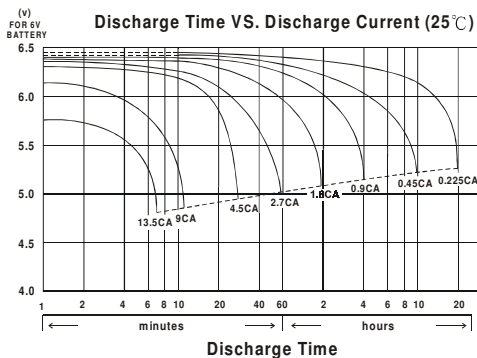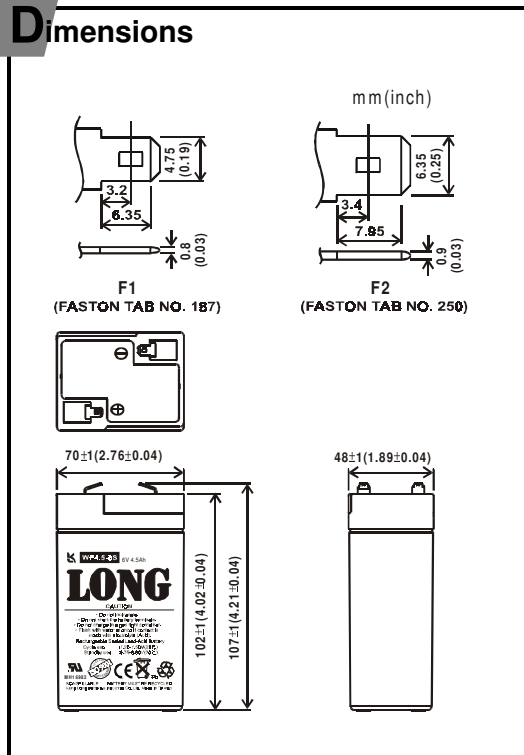

廣隆光電科技股份有限公司 Kung Long Batteries Industrial Co., Ltd.

南投市自立三路6號 NO. 6 TZU-LI 3 ROAD NANTOU CITY TAIWAN TEL: +886-49-2254777 ~8 FAX: +886-49-2253607