

⑤xDピックアップカード用コンパクトフラッシュアダプター
CompactFlash™ Adapter for xD-Picture Card™



Model Number	Operating Voltage	Current Consumption (Max.)	Suitable Media		Interface	Temperature	Dimensions L×W×T(mm)
			xD-Picture Card™	SmartMedia™			
BN-CFDABNB	5V±0.5V or 3.3V±0.165V	150mA	16MB-512MB	—	CF Type 1	· Operating Temperature : 0°C~60°C · Storage Temperature : -20°C~70°C	CF Type 1 36.4x42.8x3.3

⑥フルサイズSRAMカード
Full size SRAM card



Model Number ※	Memory capacity (Bytes)	Access time	Current Consumption (Max.)	Battery Life (CR2025) at 25°C	Sub Battery	Operating Voltage	Temperature	Dimensions L×W×T(mm)
BN-064HSR	64K	200nS	150mA	5 years	Built-in	5V±0.5V	· Operating Temperature : 0°C~60°C · Storage Temperature : -20°C~70°C	PC Card Type 1 85.6x54.0x3.3
BN-128HSR	128K							
BN-256HSR	256K							
BN-512HSR	512K							
BN-01MHSR	1M			3 years				
BN-02MHSR	2M			1 year				
BN-04MHSR	4M			6 months				
BN-08MHSR	8M							

※品番末尾に0を付加して注文いただくと2KバイトのEEPROMのアトリビュートメモリ付きとなります。


※Add C to the end of the model number to order cards with 2K bytes EEPROM attribute memory.

⑦フルサイズフラッシュメモリーカード
Full size Flash memory card



Model Number	Common memory capacity (Bytes)	Access time	Operating Voltage	Current Consumption (Max.)	Attribute Memory (Bytes)	Temperature	Dimensions L×W×T(mm)
BN-02MHFCK2	2M	250 nS	5V±0.5V	150mA	EEPROM : 2K	· Operating Temperature : 0°C~60°C · Storage Temperature : -30°C~80°C	PC Card Type 1 85.6x54.0x3.3
BN-04MHFCK2	4M						
BN-08MHFCK2	8M						
BN-12MHFCK2	12M						
BN-16MHFCK2	16M						
BN-20MHFCK2	20M						
BN-24MHFCK2	24M						
BN-28MHFCK2	28M						

⑧フルサイズATAカード
Full size ATA Flash memory card

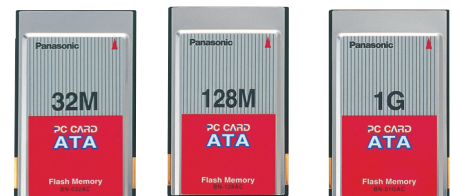

Model Number	Memory capacity (Bytes)	Number of Cylinders	Number of Heads	Number of Sectors/Tracks	Number of Sectors	Operating Voltage	Current Consumption (Typ.)	Temperature	Dimensions L×W×T (mm)
BN-016AC-G	16,384,000	1,000	2	16	32,000	5V±0.5V or 3.3V±0.3V	30mA	· Operating Temperature : 0°C~60°C · Storage Temperature : -30°C~80°C	PC Card Type 2 85.6x54.0x5.0
BN-032AC-G	32,768,000	500	8		64,000				
BN-048AC-G	49,152,000	750		32	96,000				
BN-096AC-G	98,304,000		192,000						
BN-128AC-G	131,072,000	500	16	63	256,000				
BN-256AC-G	262,144,000	1,000			512,000				
BN-512AC-G	523,837,440	1,015	32	32	1,023,120				
BN-016AC-G	1,048,190,976	2,031			2,047,248				
BN-026AC-P	2,055,208,960	7,840			4,014,080				